



269A9265

KIT

REVISIONS			
SYM	DESCRIPTION	DATE	APP'D

PRODUCTION

2.75 DIA. STOCK TUBING

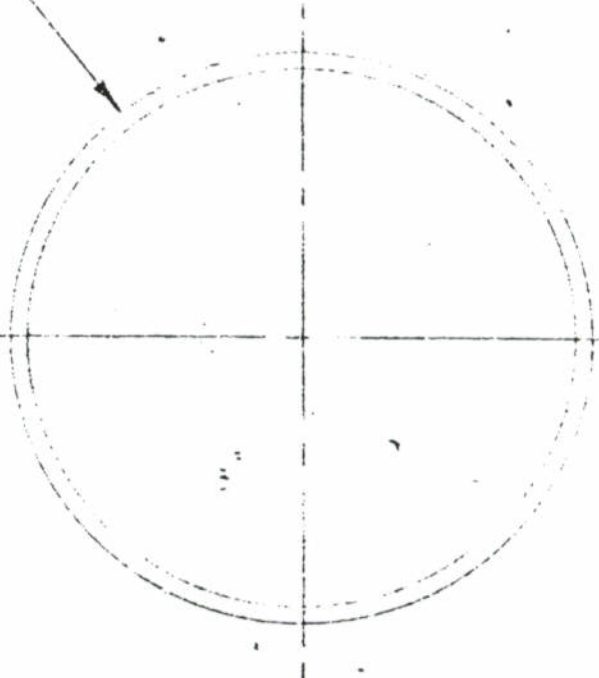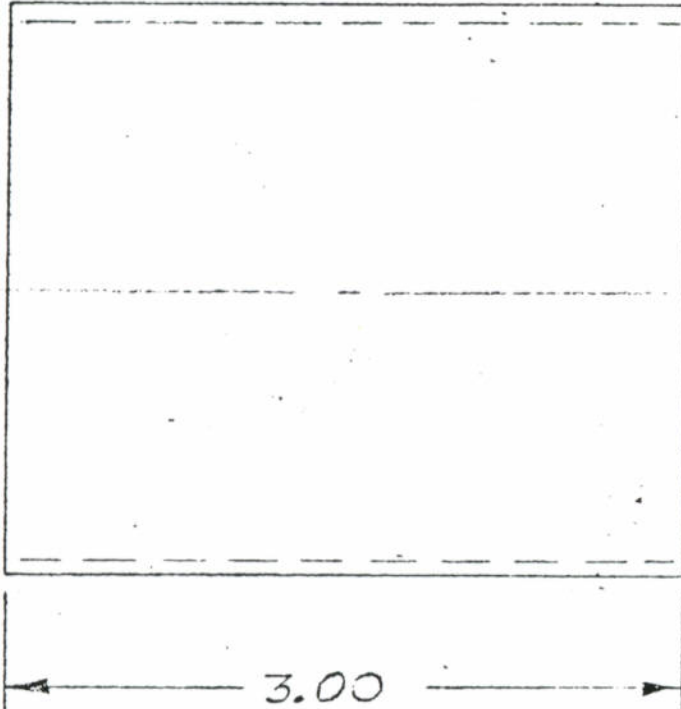


FILE COPY

3. REMOVE BURRS
2. IDENTIFY PER HP 8-5 (INK STAMP)
1. IRIDITE PER HP 4-57

NOTES:

OR EQUIV

2.75 O.D. .062/.125 WALL		269A5618 TUBING 2024-C		COMM.	
REQD	PART NO.	NAME	SIZE	DESCRIPTION	SPECIFICATION
UNLESS OTHERWISE SPECIFIED		DRWN <i>L. Johnson</i>	<i>4/2/62</i>	SLEEVE — 269A5618 REMOVAL, ARBOR PRESS	HUGHES TOOL COMPANY AIRCRAFT DIVISION CULVER CITY, CALIFORNIA 
DIMENSIONAL TOLERANCES		CHK'D <i>L. Johnson</i>	<i>4/2/62</i>		
3 PLACE DECIMAL ± .010		APP'D <i>K. Johnson</i>	<i>7/27/64</i>		
2 PLACE DECIMAL ± .03		APP'D <i>L. Johnson</i>	<i>4/2/62</i>		
ANGULAR ± 0°30'		APP'D			
DIMENSIONS TO BE MET BEFORE PLATING.		APP'D			
INNER RADIUS .062 ON C		APP'D		SCALE FULL	269A9265
BORES AND SPOT FACES OF 1.250 DIA. OR LESS —		APP'D			
.093 RADIUS ON GREATER THAN 1.250 DIA.		APP'D			
				CODE 02731	SHEET 1 OF 1